



AGM BATTERY NF Series

NF12-125 (12V 125AH)



The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

Battery Construction

COMPONENT	POSITIVE PLATE	NEGATIVE PLATE	CONTAINER	COVER	SAFETY VALVE	TERMINAL	SEPARATOR	ELECTROLYTE
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper/Plug	Fiberglass	Sulfuric acid

Performance Characteristics


- **Nominal Voltage** 12V
- **Number of Cell** 6
- **Nominal Capacity (77°F /25°C)**
 - 20 Hour rate (6.67A, 10.8V) 133.4Ah
 - 10 Hour rate (12.5A, 10.8V) 125Ah
 - 5 Hour rate (23.8A, 10.5V) 119Ah
 - 1 Hour rate (91.7A, 9.6V) 91.7Ah
- **Internal Resistance**
 - Fully charged battery (77°F /25°C) 5mΩ
- **Capacity affected by temperature (20 hour rate)**
 - 104°F (40°C) 102% 32°F (10°C) 85%
 - 77°F (25°C) 100% 5°F (-15°C) 65%
- **Self-Discharge 68°F (20°C)**
 - Capacity after 3 month storage 90%
 - Capacity after 6 month storage 80%
 - Capacity after 12 month storage 60%
- **Max. discharge current 77°F /25°C** 900A(5S)
- **Charge Methods: constant voltage charge 77°F /25°C**
 - Cycle use 14.4 ~ 14.7V
 - Max. Current 31.3A
 - Standby use 13.6 ~ 13.8V

General Features

- **Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.**
- **Not restricted for air transport-complies with IATA/ICAO Special Provision A67.**
- **A recognized component of CE and UL**
- **Computer designed lead, calcium tin alloy grid for high power density.**
- **Long service life, float or cyclic applications.**
- **Maintenance-free operation.**
- **Low self discharge**
- **Design life 10 years**

Dimensions and Weight

Type	Length	Width	Height	Total Height	Approx. Weight
SI Units	436mm	108mm	317mm	317mm	39.5Kg
English Units	17.2inch	4.25inch	12.5inch	12.5inch	87.1lbs

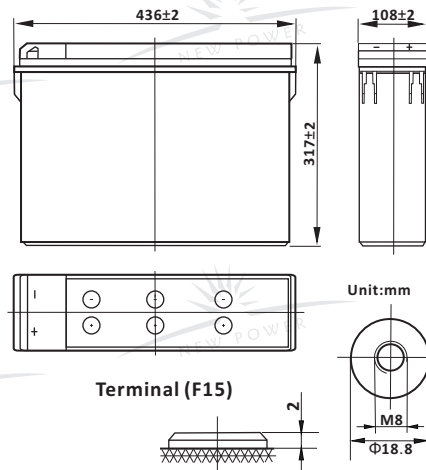

Constant Current Discharge (Amperes at 77°F/25°C)

V/cell	10min	15min	30min	45min	1h	5h	10h	20h
1.60	313	223	146	113	91.7	24.3	12.8	6.88
1.65	300	217	142	110	90.0	24.2	12.8	6.83
1.70	285	208	137	106	87.5	24.0	12.7	6.79
1.75	268	198	132	102	84.2	23.8	12.6	6.75
1.80	249	186	125	97.0	80.0	23.6	12.5	6.67

Constant Power Discharge (Watts at 77°F/25°C)

V/cell	10min	15min	30min	45min	1h	2h	3h	5h
1.60	450	376	252	192	157	90.8	66.1	44.2
1.65	428	361	246	188	154	89.3	65.4	43.9
1.70	406	347	239	184	150	87.9	64.7	43.6
1.75	383	333	232	179	147	86.4	63.9	43.2
1.80	361	318	225	175	144	85.0	63.2	42.9

(Note: The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.)



