



AGM BATTERY NH Series



NH12-92W

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

Battery Construction


COMPONENT Raw material	POSITIVE PLATE Lead dioxide	NEGATIVE PLATE Lead	CONTAINER ABS	COVER ABS	SAFETY VALVE Rubber	TERMINAL Copper/Plug	SEPARATOR Fiberglass	ELECTROLYTE Sulfuric acid
---------------------------	--------------------------------	------------------------	------------------	--------------	------------------------	-------------------------	-------------------------	------------------------------

Performance Characteristics


- **Nominal Voltage** 12V
- **Number of Cell** 6
- **Nominal Capacity (77°F / 25°C)**
 15 min Wattage @ 1.67V 92W/cell
 20 Hour rate (1.075A, 10.5V) 21.5Ah
- **Internal Resistance**
 Fully charged battery (68°F / 20°C) 9.0mΩ
- **Self-Discharge 68°F (20°C)**
 Capacity declined per month 3%
- **Max. discharge current 68°F / 20°C** 220A(5S)
- **Short Circuit Current** 700A
- **Charge Methods: constant voltage charge 68°F / 20°C**
 Cycle use 14.5 ~ 14.9V
 Max. Current 5.5A
 Standby use 13.6 ~ 13.8V

General Features

- **Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.**
- **Not restricted for air transport-complies with IATA/ICAO Special Provision A67.**
- **A recognized component of CE and UL**
- **Computer designed lead, calcium tin alloy grid for high power density.**
- **Long service life, float or cyclic applications.**
- **Maintenance-free operation.**
- **Low self discharge**
- **Design life 5 years**

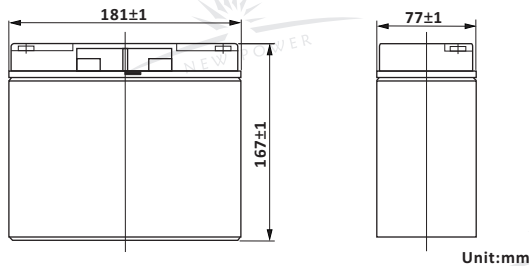

Unit:mm

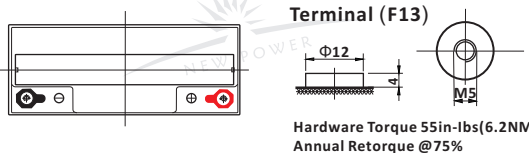

Dimensions and Weight

Type	Length	Width	Height	Total Height	Approx. Weight
SI Units	181mm	77mm	167mm	167mm	6.3Kg
English Units	7.13inch	3.03inch	6.57inch	6.57inch	13.9lbs

Constant Current Discharge (Amperes at 77°F/25°C)

V/cell	10min	15min	30min	45min	1h	3h	5h	10h	20h
1.60	66.9	56.1	30.7	22.7	17.4	6.58	3.97	2.14	1.095
1.65	65.6	53.4	29.2	21.6	16.7	6.49	3.91	2.10	1.089
1.70	63.1	50.2	27.6	20.5	15.9	6.34	3.81	2.05	1.083
1.75	61.2	48.4	26.5	19.6	15.2	6.20	3.75	2.00	1.075
1.80	58.1	43.7	25.6	18.9	14.8	5.78	3.65	1.93	1.069

Constant Power Discharge (Watts at 77°F/25°C)

V/cell	10min	15min	30min	45min	1h	3h	5h	10h	12h
1.60	126	95.5	54.8	41.1	31.8	13.3	8.23	4.11	3.49
1.65	123	93.7	53.2	40.3	31.5	12.8	8.06	4.07	3.44
1.67	121	92.0	52.7	39.4	31.0	12.5	7.88	4.04	3.41
1.70	119	90.2	51.5	38.3	30.5	12.2	7.70	4.01	3.39
1.75	117	86.8	50.1	36.4	29.8	11.6	7.34	3.98	3.35
1.80	112	82.6	49.1	34.4	29.3	11.1	6.93	3.96	3.28

(Note: The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.)



