



AGM BATTERY ND Series

NM 12-134D (12V 134AH)



The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

Battery Construction

COMPONENT	POSITIVE PLATE	NEGATIVE PLATE	CONTAINER	COVER	SAFETY VALVE	TERMINAL	SEPARATOR	ELECTROLYTE
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper/Plug	Fiberglass	Sulfuric acid

Performance Characteristics



- **Nominal Voltage** 12V
- **Number of Cell** 6
- **Nominal Capacity (77°F /25°C)**
 - 20 Hour rate (7.0A, 10.8V) 140Ah
 - 10 Hour rate (13.4A, 10.8V) 134Ah
 - 5 Hour rate (24.2A, 10.5V) 121Ah
 - 1 Hour rate (92A, 9.6V) 92Ah
- **Internal Resistance**
 - Fully charged battery (77°F /25°C) 4mΩ
- **Capacity affected by temperature (10 hour rate)**
 - 104°F (40°C) 102% 32°F (10°C) 85%
 - 77°F (25°C) 100% 5°F (-15°C) 65%
- **Self-Discharge 68°F (20°C)**
 - Capacity after 3 month storage 90%
 - Capacity after 6 month storage 80%
 - Capacity after 12 month storage 60%
- **Max. discharge current 77°F /25°C** 1000A(5S)
- **Charge Methods: constant voltage charge 77°F /25°C**
 - Cycle use 14.4 ~ 14.7V
 - Max. Current 33.5A
 - Standby use 13.6 ~ 13.8V

General Features

- **Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.**
- **Not restricted for air transport-complies with IATA/ICAO Special Provision A67.**
- **A recognized component of CE and UL**
- **Computer designed lead, calcium tin alloy grid for high power density.**
- **Long service life, float or cyclic applications.**
- **Maintenance-free operation.**
- **Low self discharge**
- **Design life 10 years**

Dimensions and Weight

Type	Length	Width	Height	Total Height	Approx. Weight
SI Units	341mm	173mm	283mm	288mm	40Kg
English Units	13.4inch	6.81inch	11.1inch	11.3inch	88.2lbs

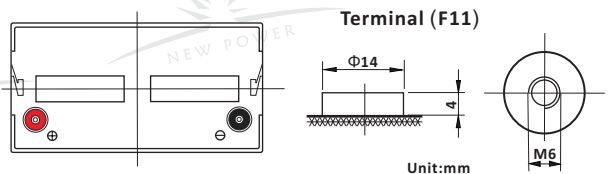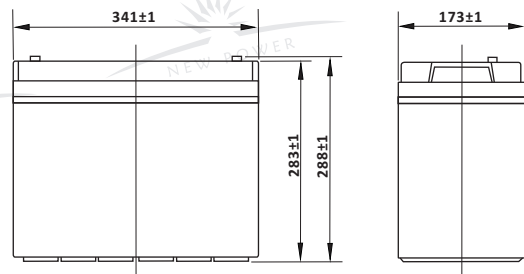

Constant Current Discharge (Amperes at 77°F/25°C)

V/cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60	440	310	245	152	92.0	39.5	25.3	13.8	7.20
1.65	423	297	236	147	89.0	38.6	25.0	13.8	7.20
1.70	404	283	226	142	85.5	37.5	24.6	13.7	7.15
1.75	383	267	216	136	82.0	36.4	24.2	13.6	7.10
1.80	361	249	205	129	78.0	35.2	23.7	13.4	7.00

Constant Power Discharge (Watts at 77°F/25°C)

V/cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60	760	550	480	285	217	175	103	72.0	51.0
1.65	730	525	460	273	209	170	100	70.5	50.2
1.70	697	498	439	259	200	164	96.5	68.8	49.3
1.75	660	468	417	245	191	158	93.0	67.0	48.3
1.80	620	435	393	230	181	151	89.0	65.0	47.1

(Note: The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.)



